

Bandido creates products that generate harmony and warmth in each space where they are present. We hope you enjoy your new product and exceeds all your expectations.

You can get more information about the maintenance of your product and warranty by scanning the following QR Code.




B

DBH 02 II

Sconce Lamp

Instructions

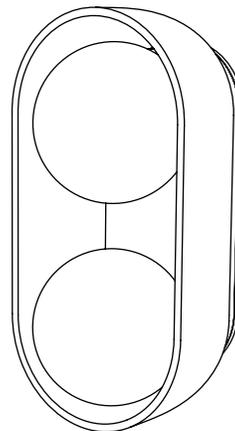

CDMX

Aristóteles 127
Polanco IV Sección Miguel Hidalgo
11550 CDMX, México

+52 555 087 2443

PUEBLA

Callejón del Cristo 2 Int. 6 A
Col. San José del Puente
72150 Puebla, Pue, México

+52 222 688 8442

Light Source

2 x 2.5 W G9 LED COB 250 lm

120 - 127 V - 60 Hz 0.020 A

2700 K

Included


Indoor Use

bandidostudio.com


Bandido

BULB REPLACEMENT


1

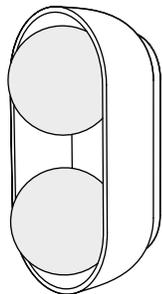


2

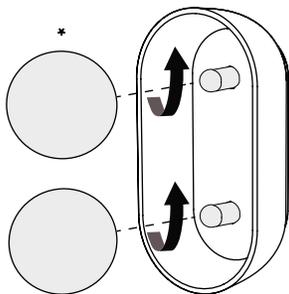

3

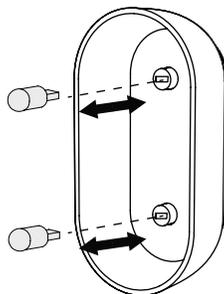

4

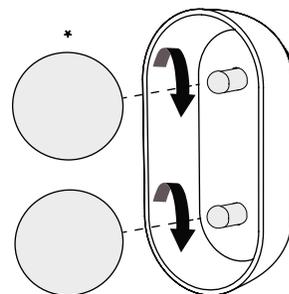

* Align the glass diffuser and screw gently to avoid jamming.



Handle with care, fragile materials.



Use only LED bulbs.

INSTALLATION GUIDE

Sconce Lamp



CAUTION: Turn off the power supply before executing any electrical installation.

We suggest that any electrical work be performed by a qualified specialist.

Included Parts:



Brass plate
2x



Screw
2x



Glass diffuser
2x



Cable Holder "8"
1x



G9 bulb
2x




Connector
1x




Wall plug
2x

1 Placement of wall plugs. Before drilling, mark the location of the drilling points according to the **Fixing template**.

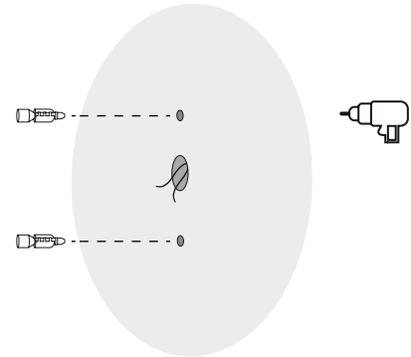


* Electrical supply cables.

2 Connect + to + and - to - using the connector.

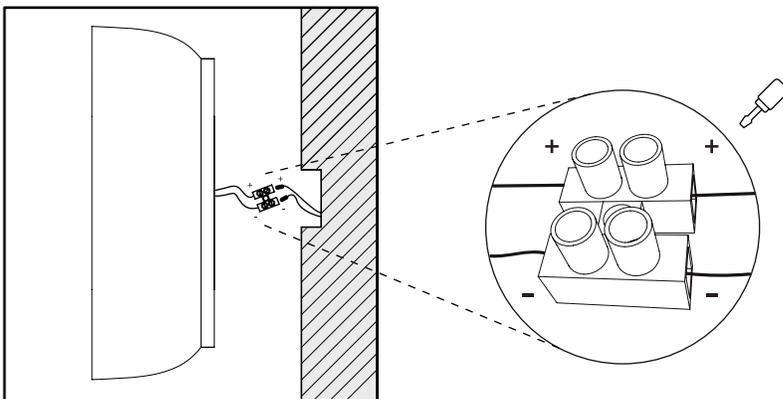


3 Fix the module to the wall.

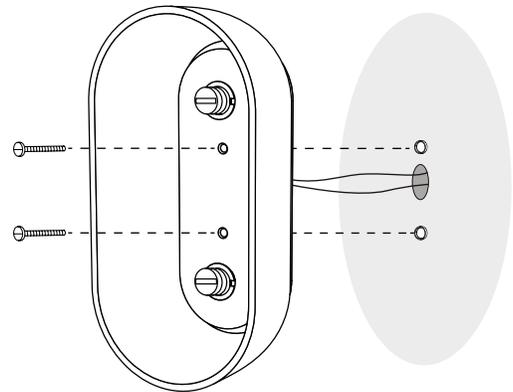

* Place cables through the hole on wall.

4 Install the brass cover, followed by the LED Bulbs and Glass Diffusers.

* Align and screw gently to avoid jamming.

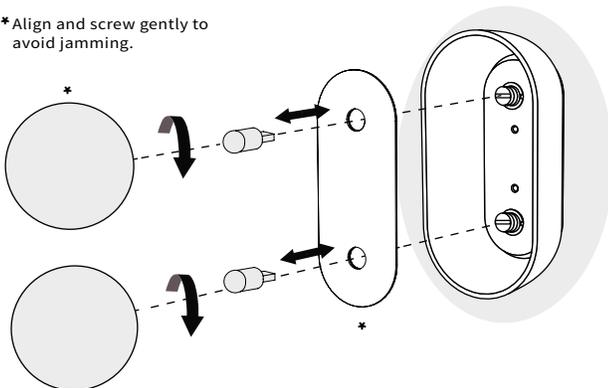

* Remove the protective film.



Handle with care, fragile materials.


TEMPLATE

PL10

DBH 02 II Sconce Lamp

Installation guide

1. Place this template on the surface where the luminaire will be installed.
2. Align and level the template using the reference line.
3. Mark the drilling holes.
4. Drill.

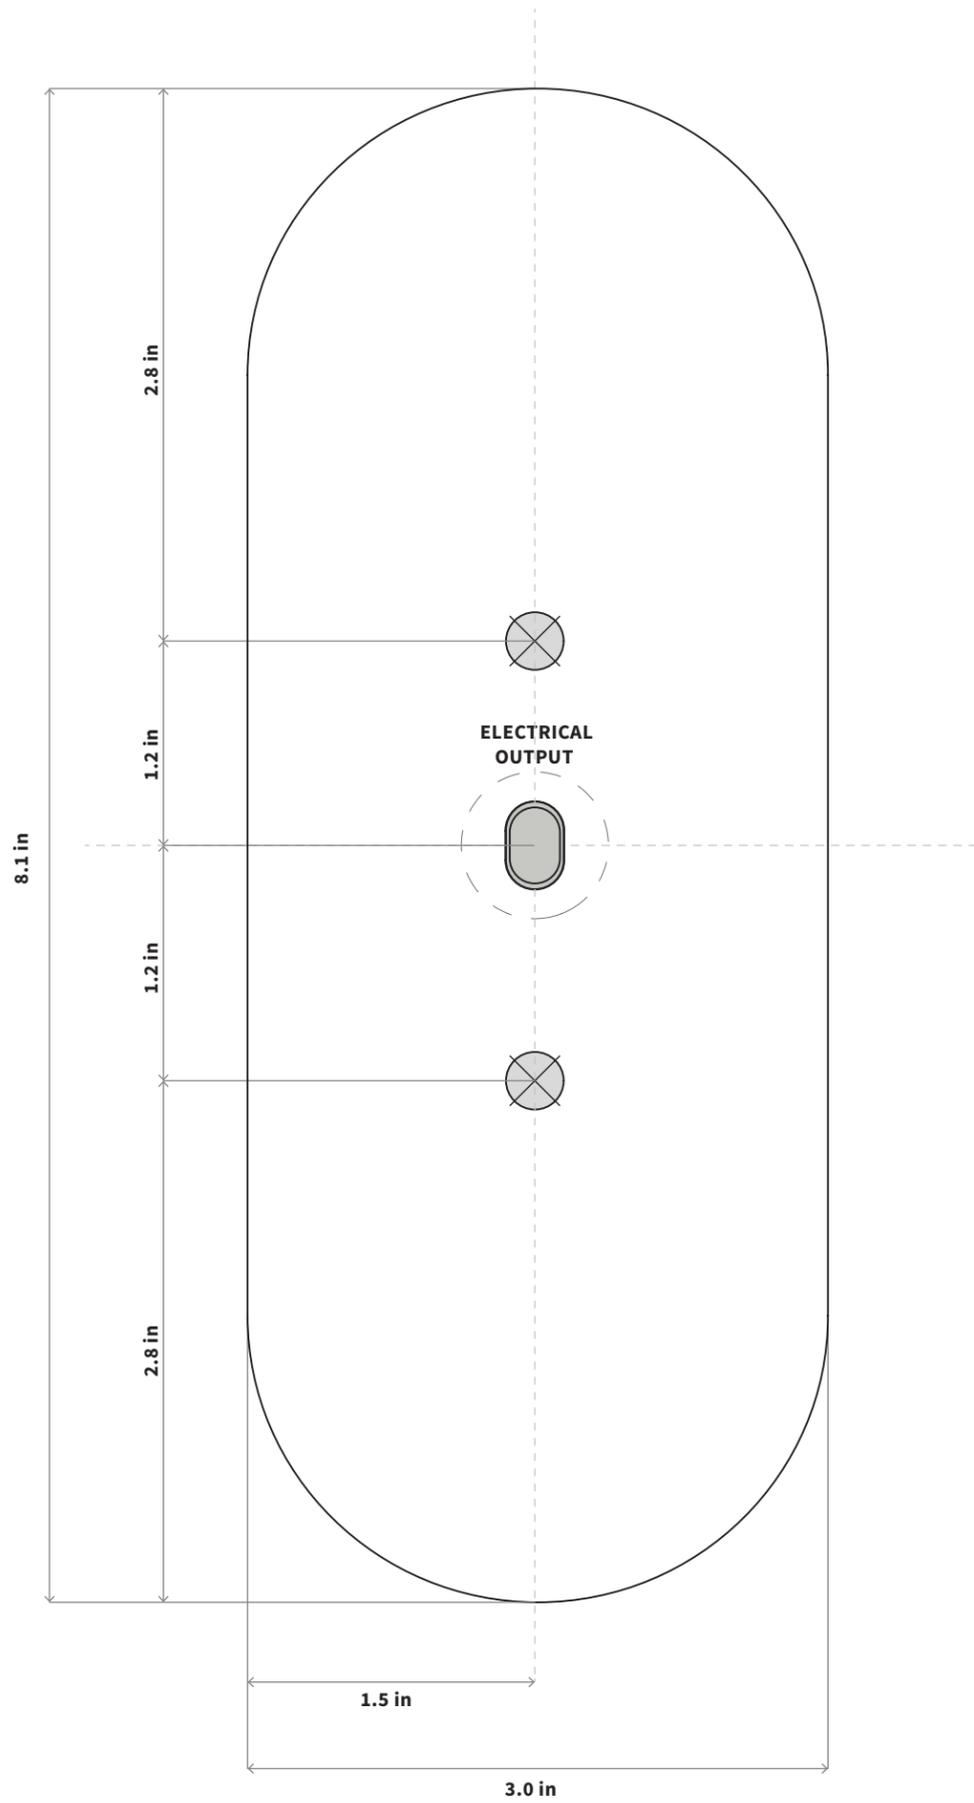

Scale 1:1



0.3 in